

Google Drive example

In the following example, I'll explain how to set OAuth2Token component for Google Drive access inside Dovetail, on Inbound / OutboundGoogleDrive components.

Step 1 - On Credentials Type field, select Google Drive, and specify all the necessary information needed.

Credentials Type

Select what type of credentials to use

Refresh token delay


Define how many seconds before the expiry date of the access token could be refreshed

Header name / Global variable


Name of the header and global variable for storing the access token

Step 2 - Click on the Authorize action button, and proceed with the Authorization process. In this case, we want to grant authorization on Test environment.


Test


A new window will popup, requesting access to your account.

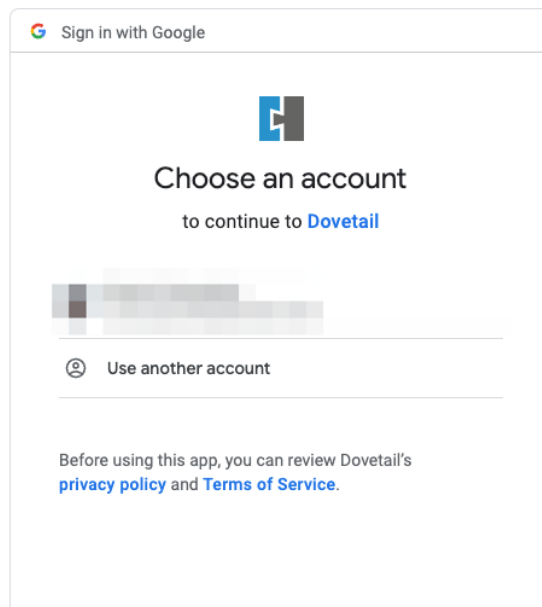

It will ask for your confirmation, to give access to your Google Drive files.

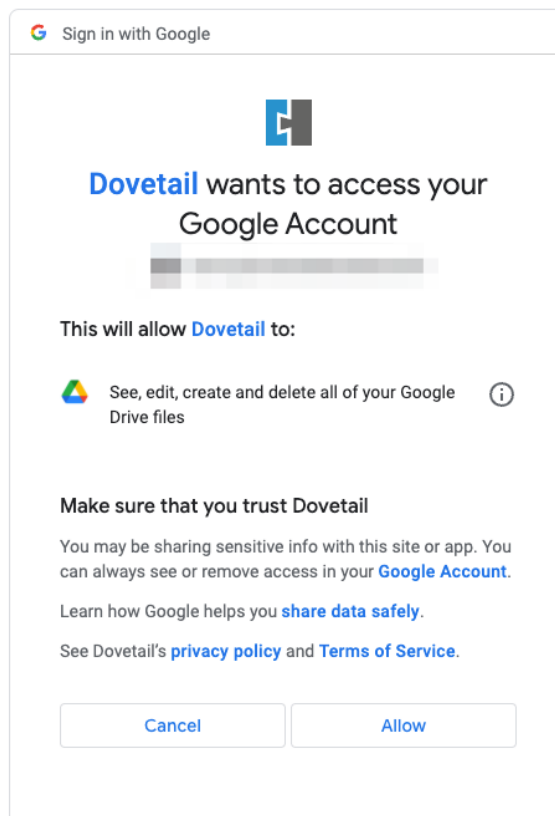

After pressing Allow, you'll receive the following successful message:

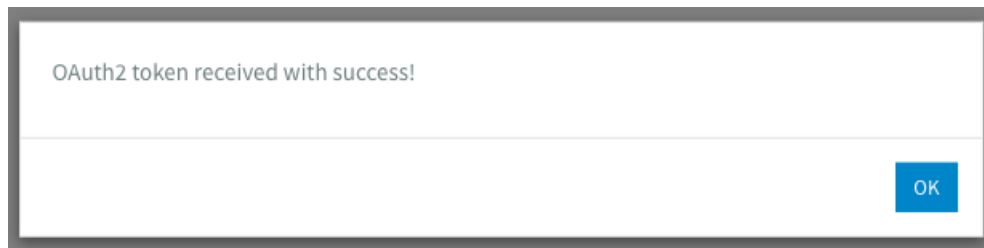

The access token is ready to be used on the Inbound / OutboundGoogleDrive component.

OutboundGoogleDriveComponent ⓘ ×

Access Token
The access token used for authentication.

Directory ID
Directory where to save files to (Find this Id in your Google Drive URL)